

Appeared in MACHINE DESIGN www.machinedesign.com

MACHINE DESIGN

BASICS OF DESIGN ENGINEERING

MOTION CONTROL


Advances in electric motors and mechanical components let engineers design motion-control systems that are reliable and easy to assemble.

Turning beverage cans into works of art

Beverage companies are gearing up to add yet another dimension to their already aggressive marketing strategy to make more attention-grabbing products. Cans are now being embossed with brand logos in addition to their normal decorations. But artfully distorting cans like this can be a challenge to machine designers who must consider production rates in thousands of cans per minute.

To put this in better perspective, people in the U.S. consume the contents of about 275 million cans in one day, or 100 billion per year. Alcoa Packaging Machines (APM), En-

glewood, Colo., High-Tek innovations Inc., Idaho Springs, Colo., and Industrial Indexing Systems (IIS), Victor, N.Y., combined expertise to design and manufacture a system capable of turning out 1,700 cans/min or 28 cans/sec. APM, under license from American National Can, Minneapolis, Minn., had worked together earlier on a similar project and developed a so-called flutter machine or can profiler that embosses a Roman-column shape on a can. But they needed High-Tek to modify the machine and IIS to design the advanced servosystem to make the new embossing procedure fast and accurate.

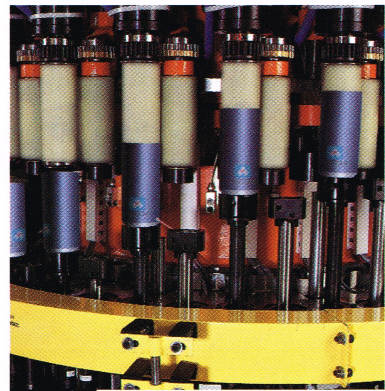

The delivery system separates cans from an infeed stream and delivers a can to one of 24 servocontrolled lift pads. Each liftpad contains a motor with a hole in its rotor that connects to a vacuum source and holds the can in place during embossing.

Call us today at (585) 924-9181 to discuss this application in greater detail

626 Fishers Run, Victor, NY. 14564 ~ info@iis-servo.com ~ www.iis-servo.com

MOTION CONTROL

BASICS OF DESIGN ENGINEERING

Their biggest challenge was designing equipment that could handle a cycle time of less than 1 sec to feed in the can, register the label decoration to a known position, emboss, release, and feed out the finished can. The can feeds into the rotating machine at 35° and exits at 338°, or only 303° and 713 msec to complete the process.


A starwheel delivery system separates previously printed cans from an infeed stream and synchronously delivers a can to one of 24 servocontrolled lift pads. Each lift pad houses a custom motor with a hole through its rotor that connects to a vacuum source. The vacuum holds the can firmly in position during the embossing process.

The lift pads travel a circular path around a central column — the main body of the embossing machine. Cans to be registered sit upright on each lift pad while miniature sensor heads mounted to each motor assembly look for a laser beam reflected from the can's surface. The sensor searches a can rotating at 200 in./sec for a registration mark, giving the motion-control system a point of reference.

From this reference, the motion controller aligns the can with the embossed tooling fixtures, lining up printed logos and trademarks on the can with their textured counterparts.

Cans are registered between the 35° mark and the 90° mark in less than 129 msec. With the servosystem controlling the can position, the motor assembly, riding along a rotary cam rises to meet the embossing tools. Each tool set consists of a positive and a negative image of the features to be embossed. One tool enters the can which then mates in rotation to its counterpart on the outside of the can wall. Having the servomotor rotate in synch with the tooling makes it possible to precisely match the decorated label and its embossed image each cycle. With the embossing operation complete, the can drops away from the tooling.

The can is embossed between the 119° mark and the 241° mark, at which point the servocontrolled lift pad delivers the can to an outfeed

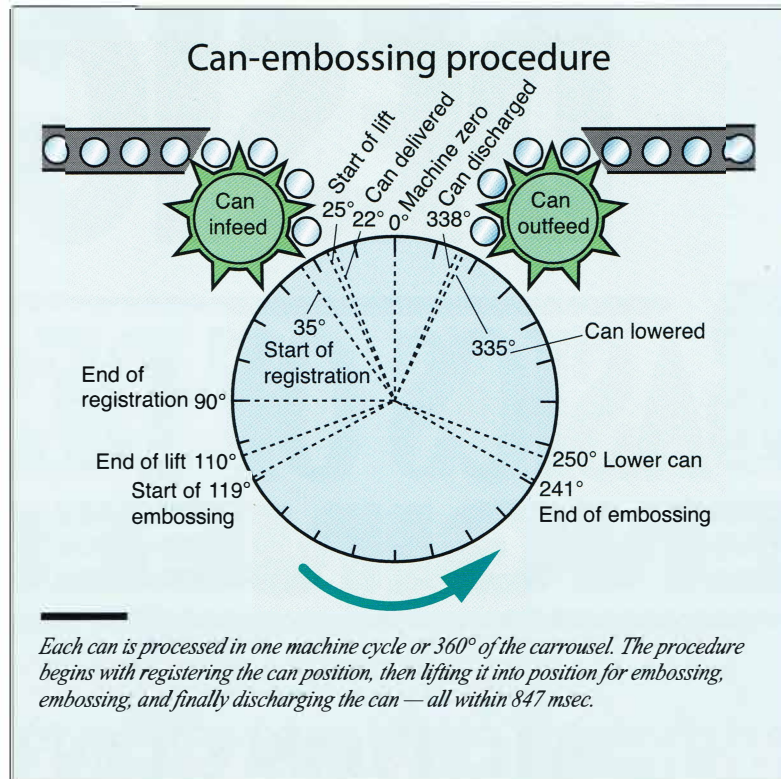

process. Removing the vacuum releases the can from the lift pad.

Through a touchscreen interface, users can compensate for mechanical harmonics, review machine performance history, and communicate by a variety of fieldbus protocols. With each servoaxis linked by a CANbus network, individual servostations can provide statistical performance criteria. This allows greater quality control and tooling setup analysis such as can registration offsets, can rejection counts, station performance, and productivity statistics. The entire motion control system interfaces with the overall machine control PLC by serial communications, interlocking all of the machine's mechanical and electrical systems into a central controller. ■

Information for this article was provided by Michael Cordaro, Industrial Indexing Systems, 626 Fishers Run, Victor, NY 14564, (585) 924-9181, Fax: (585) 924-2169, www.IIS-Servo.com.

Copyright © by Penton Media, Inc.

A-23-BC-3

Call us today at (585) 924-9181 to discuss this application in greater detail

626 Fishers Run, Victor, NY. 14564 ~ info@iis-servo.com ~ www.iis-servo.com

INDUSTRIAL INDEXING SYSTEMS, INC

626 Fishers Run, Victor, NY. 14564 ~ (585) 924-9181

info@iis-servo.com ~ www.iis-servo.com



Team IIS



Headquarters in Victor NY



Our objective is to bring state-of-the-art servo system products to practical use on the factory floor. Whether it is a complete turnkey system or servo components, IIS' commitment to quality products and personalized support is unsurpassed. Our business philosophy is pretty simple. We take responsibility for everything we sell. By doing that we make a long-term commitment to our customer's success.

To accommodate the steady growth we've enjoyed over the years, our facility has been expanded several times to its present 17,000 square foot capacity. This location houses all critical departments - Sales, Marketing, Applications Engineering, R&D, Production, Warehouse, Panel Shop, Quality Control and Customer Support. Having everything under one roof speeds communications and provides better service to our customers.

Sales Representatives

■ Applied Motion Solutions, Inc

Area: CT, ME, MA, NH, VT, RI
George Fede (860)930-8066
Email: georgefed@amsmotion.com

Dawn MacKerron (617)489-4709
Email: dawnmackerron@amsmotion.com

■ Brundage Associates, Inc

Area: NJ, Downstate NY, Eastern PA, DE, MD
Bruce Kramer (610)393-9497
Email: BruceKramer@Brundage-Inc.com

Thomas Miceli (973)521-0552
Email: TomMiceli@Brundage-Inc.com

■ New Age Industrial Sales

Area: CO, UT, WY
Edward Rhoden (970)573-6398
Email: e.rhoden@newageindustrialsales.com

■ Jake Rudisill Associates

Area: NC, SC, TN, GA, FL, VA, AL, MS
Lantz Critel (704)910-9227
Email: Lantz.critel@JakeRudisill.com

Sam Thomas (704)907-2179
Email: sam.thomas@jakerudisill.com

Douglas Thackery (770)794-8111
Email: doug.thackery@JakeRudisill.com

■ Satek Engineered Components, Inc

Area: WI, IL, IN
Michael Gabel (312)813-0104
Email: mike@satek.com

■ Motors, Drives & Gears + Controls

Area: TX, OK, AR, LA, NM
Ray W. Zimbal Jr (817)307-1274 / (713)835-9753
Email: Sales@MDGControls.com

■ Culpepper Solutions Group

Area: Western PA, OH, WV, KY
Larry Culpepper (804)312-5985
Email: larry@culpeppersolutions.com

Ryne Culpepper (804)312-5985
Email: ryne@culpeppersolutions.com

■ Axiom GB Ltd


Area: United Kingdom, Europe
Matthew Nickson 011 44 1827 61212
Email: Matthew.Nickson@AxiomGB.com

■ IIS Headquarters, Victor, NY

US States, Canada and Mexico

Alaska	Iowa	Nevada
Arizona	Kansas	North Dakota
California	Michigan	Oregon
DC	Minnesota	Puerto Rico
Guam	Missouri	South Dakota
Hawaii	Montana	Virgin Islands
Idaho	Nebraska	Washington

If you would like to discuss the opportunity of becoming a Sales Representative for our organization, drive brand awareness, and develop business relationships with new and existing clients, please contact Mike Hupf, Sales Manager at (585)924-9181

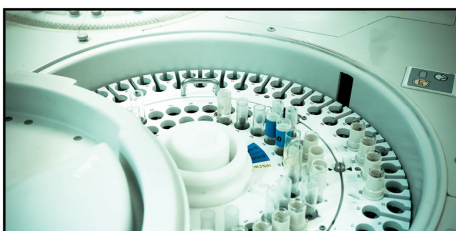

Ready to elevate the efficiency, consistency, and repeatability in your operations? Call us today at (585)924-9181 to discuss your application needs